



MS-Flo Eco

Application

All HVAC and air handling installations with a filtration function.

Filtration of coarse , Fine and superfine dust.

Synthetic melt blown wedge-shaped pockets with spacers.

Number of pockets & depth are optional.

Fire protection : Class **B** as of DIN EN 13 501-1 2007

Specification


Nominal Size WxHxD (in)	Actual Size WxHxD (mm)	No. of Pockets	Filter Class EN779	Rated Air Flow (CMH)	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)
24 x 24 x 21	592 x 592 x 534	6	9	3400	157	450
12 x 24 x 21	287 x 592 x 534	3	9	1700	157	450
24 x 24 x 21	592 x 592 x 534	6	8	3400	142	450
12 x 24 x 21	287 x 592 x 534	3	8	1700	142	450
24 x 24 x 21	592 x 592 x 534	6	7	3400	123	450
12 x 24 x 21	287 x 592 x 534	3	7	1700	123	450
24 x 24 x 21	592 x 592 x 534	6	6	3400	95	450
12 x 24 x 21	287 x 592 x 534	3	6	1700	95	450
24 x 24 x 21	592 x 592 x 534	6	5	3400	70	450
12 x 24 x 21	287 x 592 x 534	3	5	1700	70	450

Operating Condition

Temperature	80°C
Humidity Limit	100%RH

Material

Frame	Galvanized Steel
Filter Media	Synthetic Fiber Fleece

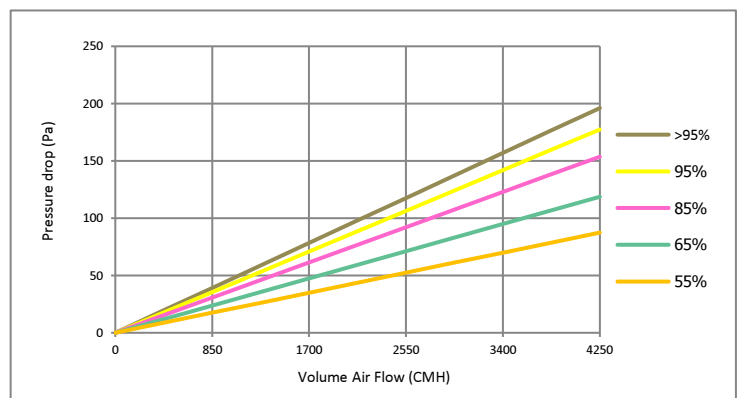

Pressure drop diagram valid for size 592 mm x 592 mm